


*Buffed-rubber treads stand up to years of heavy wear, even in extremely high traffic areas. Low-density polyethylene (LDPE hinges) have large drain holes to allow dirt to fall through to the recess and allow the mat to roll-up for easy cleaning. This product carries a five-year warranty.*

**DETAIL NOTES:**


- 1 - Tread rails must run perpendicular to traffic direction.
- 2 - Dimensions in the traffic direction can only be changed in 1-1/2" (38.1mm) increments unless aluminum filler is attached to the frame.
- 3 - Dimensions allow for clearance between the grate sections and the frame in the width dimension.

**SPECIFICATION:**

Model G-275 EnvIRONtread<sup>®</sup> roll-up grate by Arden Architectural Specialties, Inc.; with 1" (25.4mm) deep, 6063-T52 aluminum alloy rails, spaced 1-1/2" (38.1mm) o.c.; with low-density polyethylene hinges, with two buffed-rubber treads per rail; use with type F-10 recessed aluminum frame.

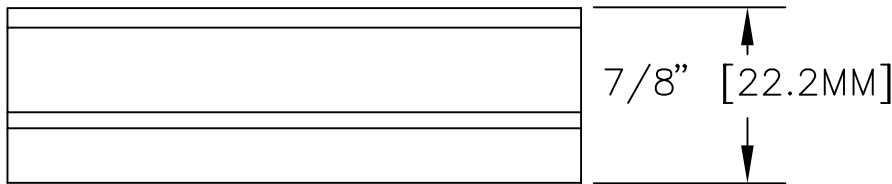

Complete specifications available on our website at [www.ardenarch.com](http://www.ardenarch.com).

CUST. ORDER #	ARCHITECT			 Arden Architectural Specialties, Inc. <sup>™</sup> 151 FIFTH AVE. NW SUITE J ST. PAUL, MN 55112-3268 TOLL-FREE 800.521.1826 TEL 651.631.1607 FAX 651.631.0251
CUSTOMER	CONTRACTOR			
PROJECT	RAIL MODEL G-275	FRAME MODEL N/A	SCALE NTS	