


*Tread rails are joined with LDPE hinges that do not shrink or crack in UV light or with changes in temperature. Treads are held in place by end caps, which create a clean edge and eliminate the need for rivets.*

**DETAIL NOTES:**


- 1 - Tread rails must run perpendicular to traffic direction.
- 2 - Grate dimensions allow for clearance between the grate sections and the frame in the width dimension. Trim the filler provided to ensure a tight fit in the traffic dimension.

**SPECIFICATION:**

GrateDesign G-150 carpet tread roll-up grate by Arden Architectural Specialties, Inc.; with 3/4" (19.1mm) deep, 6063-T52 aluminum alloy rails, with treads of 17 denier, solution-dyed nylon; secured with end caps; spaced 1-1/2" (38.1mm) o.c.; use with [type F-11 aluminum recessed][type F-14 aluminum angle] frame.

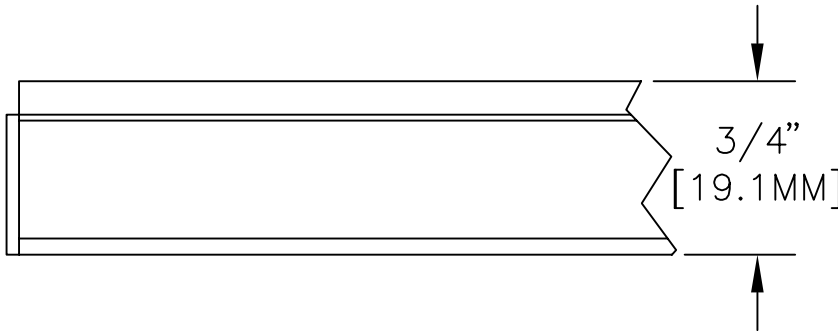

Complete specifications available on our website at [www.ardenarch.com](http://www.ardenarch.com).

CUST. ORDER #	ARCHITECT			 Arden Architectural Specialties, Inc.™ 151 FIFTH AVE. NW SUITE J ST. PAUL, MN 55112-3268 TOLL-FREE 800.521.1826 TEL 651.631.1607 FAX 651.631.0251
CUSTOMER	CONTRACTOR			
PROJECT	RAIL MODEL G-150	FRAME MODEL N/A	SCALE NTS	