



*Arden Architectural's aluminum hinge roll-up mats have all aluminum rails. Unlike mats with hidden vinyl under-channels or vinyl rail, aluminum rail mats are suitable for commercial applications. They maintain their integrity in all weather conditions so treads stay in the rails.*

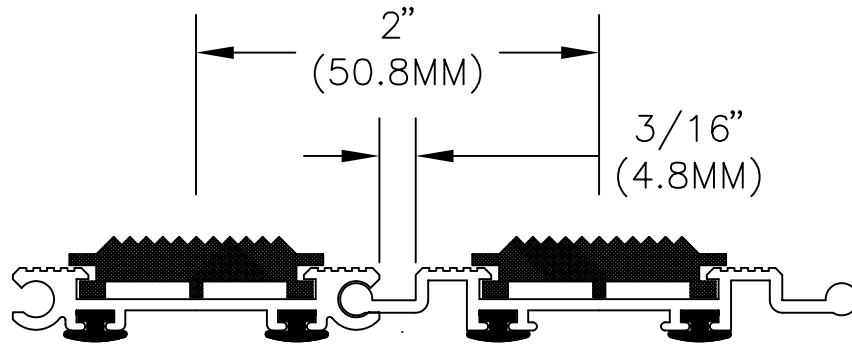

**DETAIL NOTES:**


- 1 - Tread rails must run perpendicular to traffic direction.
- 2 - Mat dimensions allow for clearance between the sections and frames in the width dimension only. Trim the filler provided to ensure a tight fit in the traffic direction.

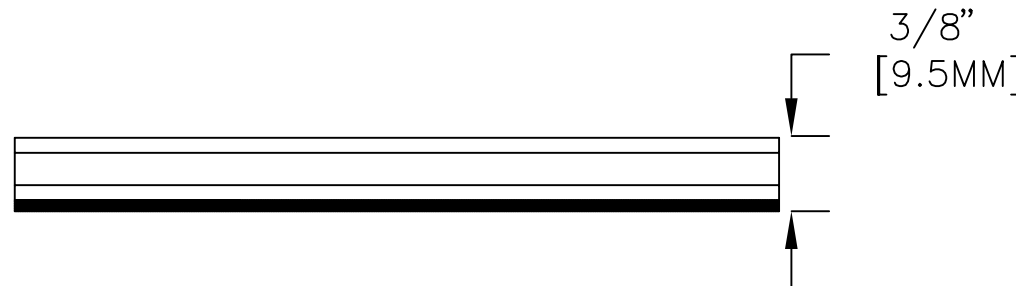

**SPECIFICATION:**

MatDesign M-700 thermoplastic rubber (TPR) tread aluminum hinge mat by Arden Architectural Specialties, Inc.; with 3/8" (9.5mm) deep, 6063-T52 aluminum alloy rails, with treads of extruded colored TPR, convex shape and continuous serrations; spaced 2" (50.8mm) o.c.; with integral aluminum hinges; use with [type F-3 aluminum recessed] [type F-4 aluminum surface mount] [type F-5 attached surface mount] [type F-6 aluminum thin line] frame.

Complete specifications available on our website at [www.ardenarch.com](http://www.ardenarch.com).

CUST. ORDER #	ARCHITECT			 Arden Architectural Specialties, Inc.™ 151 FIFTH AVE. NW SUITE J ST. PAUL, MN 55112-3268 TOLL-FREE 800.521.1826 TEL 651.631.1607 FAX 651.631.0251
CUSTOMER	CONTRACTOR			
PROJECT	RAIL MODEL M-700	FRAME MODEL N/A	SCALE NTS	